

Dolby Digital and DTS A/V Receiver

AVR-1801

DENON


90th
ANNIVERSARY
DENON
SINCE 1910
20th Anniversary
DENON ELECTRONICS
A MEMBER OF THE SONY CORPORATION GROUP

Outstanding Dolby Digital and DTS Sound At An Affordable Price

The AVR-1801 is an A/V receiver that has inherited advanced technology for high-quality sound from DENON's high-end models. The power amp section features a discrete configuration to ensure equal response from all five channels, each of which is driven with a robust 70 watts of power to let you enjoy rock-solid, dynamic sound.

As the AVR-1801 is equipped with Dolby Pro Logic, Dolby Digital and DTS decoding, all of your favorite music and movie sources are reproduced with outstanding clarity and exciting spaciousness.

The AVR-1801 naturally provides a generous array of input and output terminals, including 2 optical digital inputs and 1 coaxial digital input for audio, and 4 sets of composite video inputs and 4 sets of S-video inputs for video sources.



Personal Memory Plus

■ Dolby Digital and DTS Decoders

Equipped with both Dolby Digital and DTS 5.1 channel decoding, the AVR-1801 provides thrilling surround sound with the thousands of Dolby Digital and DTS encoded DVDs, as well as the growing library of DTS 5.1 channel music recordings available on CD.

■ Fully Discrete, Equal Power Five Amplifier Channels, 70 Watts Each

Front.....	70 W + 70 W	(8 ohms, 20 Hz - 20 kHz, 0.08 % THD)
	105 W + 105 W	(6 ohms, 1 kHz, 0.7 % THD)
Center	70 W	(8 ohms, 20 Hz - 20 kHz, 0.08 % THD)
	105 W	(6 ohms, 1 kHz, 0.7 % THD)
Surround	70 W + 70 W	(8 ohms, 20 Hz - 20 kHz, 0.08 % THD)
	105 W + 105 W	(6 ohms, 1 kHz, 0.7 % THD)

For optimum Dolby Digital and DTS reproduction, the AVR-1801 features high quality, wideband audio amplification, providing 70 watts power output for each of the five main channels. A large capacity power supply includes a high current power transformer along with discrete power output devices on all five amplifier channels for highest dynamic range and superb reproduction clarity.

■ 5 Channel Stereo Mode

DENON's exclusive 5 Channel Stereo mode provides superb surround sound with conventional two channel music and video sources. Hear exciting surround sound from all five speakers with your favorite two channel music sources such as CD, tape, stereo radio and stereo video sources.

■ Virtual Surround Mode

Surround yourself with sensational 3D soundfield envelopment using just one pair of speakers. The AVR-1801's Virtual Surround mode provides a dramatic psychoacoustic surround sound effect, using two speakers with Dolby Digital 5.1 encoded sources.

■ DENON DSP Surround Modes Add Listening Excitement

Put yourself in the middle of your favorite concert hall and music environments with DENON's DSP acoustic environment simulation modes. These DSP modes add spacious surround sound enhancements to your favorite music and video sources, and include these distinctly different sounding effects:

- | | |
|---------------------|---------------|
| 1. 5 Channel Stereo | 5. Video Game |
| 2. Virtual Surround | 6. Matrix |
| 3. Rock Arena | 7. Mono Movie |
| 4. Jazz Club | |

■ Cinema Equalizer

The sound from movie sources recorded in Dolby Digital, DTS or other formats emphasizes correction of components that deteriorate in the high-frequency range due to the movie screen. If this sound is reproduced in the home theater without correction, the high-frequency range is too strong. The AVR-1801 features a Cinema Equalizer to correct these high-frequency components so that the sound is clearer and easier to listen to. (For Dolby Digital, Dolby Pro Logic, and DTS surround modes)

■ Supports Next Generation High Resolution Formats

Future system upgrade capability is provided with the AVR-1801's 6 Channel External Input feature. For next generation high resolution multi-channel audio formats such as DVD-Audio and SACD, the 6 Channel External Input is equipped with a wideband frequency response extending to 100 kHz. In addition, the digital inputs support high resolution 24 bit, 96 kHz stereo PCM soundtracks, available on selected audiophile DVD music releases.

■ "S" and Composite Video Switching

Four sets of composite video (coaxial jack) and four sets of "S"-video terminals are provided (TV, VCR-1, VCR-2 and DVD inputs), allowing a full complement of video sources to be switched and routed to the monitor TV.

■ Front A/B Speaker Terminals

Two sets of speaker terminals are provided for the main (left and right) speakers. This allows the use of a second pair of stereo speakers in another room in the home.

■ Versatile Input & Output Terminals

For maximum system flexibility, the AVR-1801 is provided with an abundance of audio and video input and output terminals. Three assignable digital inputs, two optical and one coaxial, can be configured according to your system's component output capabilities. The AVR-1801 provides seven sets of analog inputs, along with four sets of video inputs, for total system connection flexibility.

• Audio Inputs

- 8 Analog Inputs PHONO, CD, TUNER, DVD/DVP, TV/DBS, VCR-1, VCR-2/V.AUX, MD/TAPE
- 6 Analog EXT. Input FRONT L/R, CENTER, SURROUND L/R, SUBWOOFER
- 2 Digital (Optical) Input OPTICAL X 2
- 1 Digital (Coaxial) Input COAXIAL X 1

• Audio Outputs

- 4 Analog PRE OUT Terminals FRONT L/R, CENTER, SUBWOOFER
- 3 Analog REC OUT Terminals VCR-1, VCR-2/V.AUX, MD/TAPE

• Video Inputs

- 4 Composite Inputs DVD/DVP, TV/DBS, VCR-1, VCR-2/V.AUX
- 4 S-Video Inputs DVD/DVP, TV/DBS, VCR-1, VCR-2/V.AUX

• Video Outputs

- 3 Composite Outputs VCR-1, VCR-2/V.AUX, MONITOR
- 3 S-Video Outputs VCR-1, VCR-2/V.AUX, MONITOR

■ Personal Memory Plus, for Easy Operation

The AVR-1801 includes the Personal Memory Plus function that automatically remembers the surround mode you last used for each program source, so that you do not need to select the mode again for that program.

■ Audiophile Quality Speaker Terminals

In addition to accepting bare wire or pin terminations, the front main speaker terminals (left, center, and right) can also accept banana-plug terminals for full compatibility with high grade speaker cables, along with easy connection capability.

*Design and specifications are subject to change without notice.

**"Dolby", "Dolby Digital", "Pro Logic", and the double-D device are registered trademarks of Dolby Laboratories Licensing Corporation.

*DTS is registered trademarks of DTS Technology.

■ Multi-Function Preset Memory Remote Controller

The supplied system remote controller features a large selection of remote control codes to operate other components in your home theater system, including codes for selected DENON models, along with remote control codes from other manufacturers. The most frequently used buttons are laid out separately for TV, VCR and DVD, for maximum ease-of-use.

■ Acclaimed Customization Feature

As with all of DENON's high-grade A/V amplifiers, the AVR-1801 lets you adjust delay times and other parameters so that you can customize the performance of the AVR-1801 to suit your own home theater and enhance operating ease. The adjustments are easy to make via a dialog format on the fluorescent display on the front panel.

■ Frequency Synthesis Tuning

- 40-Station AM/FM Random Preset Memory Tuning
- Auto Preset Memory

Specifications

■ Power Amplifier Section

Rated output	*THD figures are power amp stage values.	
Front.....	70 W + 70 W	(8 ohms, 20 Hz - 20 kHz, 0.08 % THD)
	105 W + 105 W	(6 ohms, 1 kHz, 0.7 % THD)
Center	70 W	(8 ohms, 20 Hz - 20 kHz, 0.08 % THD)
	105 W	(6 ohms, 1 kHz, 0.7 % THD)
Surround.....	70 W + 70 W	(8 ohms, 20 Hz - 20 kHz, 0.08 % THD)
	105 W + 105 W	(6 ohms, 1 kHz, 0.7 % THD)

■ Preamplifier Section

Input sensitivity/Impedance	
PHONO (MM).....	2.5 mV/47 kohms
CD, DVD/DP, TV/DBS, VCR-1, VCR-2/V.AUX, MD/TAPE, FRONT L/R, CENTER, SURROUND L/R, SUBWOOFER.....	200 mV/47 kohms
Output level/Load impedance	
FRONT L/R, CENTER, SUBWOOFER.....	1.2 V/10 kohms
MD/TAPE MONITOR, VCR-1, VCR-2/V.AUX	200 mV/47 kohms
Frequency response	10 Hz - 100 kHz (+1, -3 dB) (Tone Defeat On)
RIAA deviation	±1 dB (20 Hz - 20 kHz)
Signal-to noise ratio	100 dB (A-weighting) (Tone Defeat On)
Tone control	Treble: ±12 dB at 10 kHz Bass: ±12 dB at 100 Hz

■ FM Section


Tuning frequency range.....	87.5 - 107.9 MHz
Usable sensitivity	1.0 μV (11.2 dBf)

■ AM Section

Tuning frequency range.....	520 - 1710 kHz
Usable sensitivity	18 μV

■ General

Power supply	AC 120 V, 60 Hz
Power consumption	4.3 A
Dimensions	434 (W) x 171 (H) x 416 (D) mm 17.1" (W) x 6.7" (H) x 16.4" (D)
Weight.....	11.3 kg, 24.9 lbs

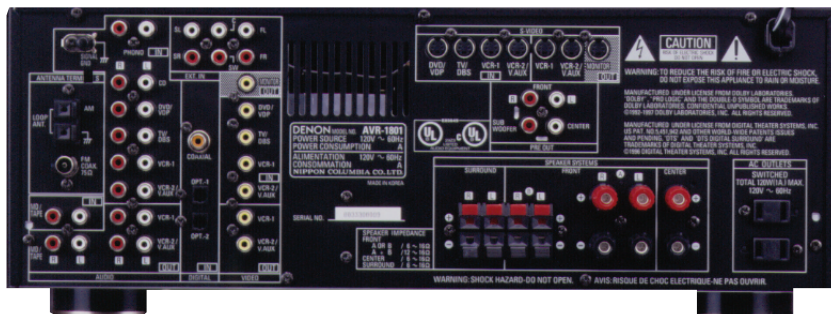

DENON ELECTRONICS
DIVISION OF DENON CORPORATION (USA)
19 CHAPIN ROAD, P.O. BOX 867, PINE BROOK, NJ 07058-9777 USA
TEL: 973-396-0810 <http://www.del.denon.com>

DENON CANADA INC.
17 DENISON STREET, MARKHAM ONTARIO, CANADA L3R 1B5
TEL: 905-475-4085

NIPPON COLUMBIA CO., LTD.
14-14, AKASAKA 4-CHOME, MINATO-KU, TOKYO 107-8011, JAPAN
<http://www.denon.co.jp>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>