

NETWORK



SURVEILLANCE

ALL-IN-ONE PROFESSIONAL DIGITAL 19" WIDE SCREEN LCD MONITOR WITH BUILT-IN DIGITAL VIDEO RECORDER



FEATURES

- High Resolution 19" Wide LCD Monitor provides Superior Image Quality in Live View and Playback
- Built-in Pentaplex Digital Video Recorder: View, Record, Playback, Back Up & Remotely Control the system simultaneously
- Real Time Recording: 240FPS @ CIF Resolution
- H.264 Video Compression to maximize your recording time
- Internet Remote Monitoring* (Software included) and Web Browser access
- (4) High Resolution Weather Proof ** Cameras included with up to 50ft (15m) Night Vision range***
- Large Capacity Security Certified Hard Drive pre-installed expandable up to 1000GB****
- USB port for back up and convenient transferring of critical data
- Mouse Driven Navigation (mouse included) and Graphical User Interface
- Message Master software (included) allows you to send text and pictures from a remote location
- Installer Friendly - Easy Quick Start Guide and Toll Free Tech Support



L19WD800 Series

INTEGRATED SURVEILLANCE

Monitor/Interface:

- 19" High Resolution (1400X900) Wide screen LCD
- Easy to use Graphical User Interface with transparent menus and mouse navigation (mouse included)
- Multiple control options: mouse, front panel buttons, remote control, remote access software
- Multiple video out options: Spot Video Out lets you control what shows on your Public View Monitor. Monitor Out also allows you to view images on a slave monitor
- Tri-lingual Display (English, Spanish, French)
- Screen saver for energy efficiency
- Wall mountable (VESA standard)
- Stand with cable management solution for tidier installation
- Environmentally friendly, recyclable packaging material

Digital Video Recorder:

- 8 channels allows you to connect up to 8 cameras
- Pentaplex operation - View, Record, Playback, Back Up & Remotely Control the system simultaneously
- H.264 Video Compression Technology increases recording time by up to 30%
- Real Time Recording: Frames Per Second (FPS): 240/200 (NTSC/PAL) @ CIF resolution
- Recording Resolution: 352x240(NTSC), 352x288(PAL)
- Covert Camera - record without displaying camera image
- Continuous Recording with Motion Event logging for easy event searching
- Panic recording mode assures best quality of recording in emergency situations
- Selectable audio recording
- Programmable motion detection
- Capture activities prior to an event with programmable pre-event recording
- Quick search with bookmark recording
- Advanced user authorization supporting up to 10 users
- Security Certified Hard Drive with SATA interface, 100% duty cycle for optimal performance in the commercial video security market. Expandable up to 1000GB****
- USB port for convenient transferring of critical data to USB flash drive
- Automatic watermarking of video files for secure data encryption

- 8 Programmable Alarm Inputs, 1 Relay Alarm output for convenient integration with alarm systems
- Pan/Tilt/Zoom Camera Control: RS-232 interface
- Network Protocol: TCP/IP, DDNS and Web

Cameras:

- Advanced high resolution image sensor produces sharp and clear video with 450 TV Lines
- 30 IR LEDs provides class leading night vision range of 50ft (15m)
- True Day/Night operation using built-in IR Filter Changeable Mechanism to achieve accurate color representation in changing lighting conditions
- Advanced Day/Night mode: picture automatically switches to B&W delivering better clarity in low light conditions
- Weatherproof Design: ideal for Outdoor and Indoor applications (IP66*)

Software:

- Internet Remote Functions*: View, Search & Playback, Back-up and Setup
- Message Master DID software sends text and pictures from a remote location
- Full management flexibility. Use advanced Lorex Remote Access Software (included) or web browser
- Microsoft Windows Vista™ Compatible
- Free Lorex DDNS (Dynamic Domain Name System) service keeps you connected anywhere all the time



* Requires a high speed internet connection and router - not included

** Not intended for submersion in water

*** IR illumination range up to 50 ft (15M) under ideal conditions. Objects at or beyond this range may be partially or completely obscured, depending on the camera application.

**** Recording capacity may vary based on recording resolution & quality, lighting conditions and movement in the scene

SPECIFICATIONS:

Monitor:

LCD:	19" Wide Screen
LCD Resolution:	1400 X 900
Monitor display:	16ch: Real time: 480/400 FPS (NTSC/PAL) 8ch: Real time: 240/200 FPS (NTSC/PAL)
Image size:	1.5 Kbyte (352 x 240)
Video inputs:	1Vp-p, CVBS, 75ohms, BNC (16ch)/ 8 BNC, 4 DIN(8 ch)
Audio inputs:	16ch: 4x line-in, RCA 8ch: 2 x line-in, RCA
Audio output:	1 x line-out, RCA
Audio:	2-way Audio conference (via network)
Supply Voltage:	100VAC-240VAC, 12VDC , 6.67A, 50/60Hz
Power consumption:	Approx. 80 watts
Temperature range:	14° F ~ 113° F (-10°C ~ 45°C)
Weight:	8.8 kg/ 19.5 Lbs
Unit Dimensions:	18.2" / 462mm X 14.5"/369mm X 2.5"/62mm (W X D X H) (Without stand)


DVR:

Hard disk capacity:	Preinstalled SATA HDD (Max 1000GB), Security Certified , 100% duty cycle
Operating System:	WinCE 5.0
Secondary Storage:	USB Flash Drive
Back-up file formats:	Proprietary
Compression:	H.264
Recording speed:	352x240 : 16 channel 480/400 (NTSC/PAL) , 352x240 : 8 channel 240/200 (NTSC/PAL) 352x240 : 4 channel 120/100 (NTSC/PAL)
Record Scheduling:	Daily, Weekly, Hourly per 4 channel group
Pre/Post alarm recording:	1~5 seconds (Pre); 5~99 seconds (Post), programmable per 4 channel group
Event search:	Up to 12,000 events
Playback:	16ch: Single, Quad or 9, 16 ch split screen 8ch: Single, Quad or 8 ch, split screen
Alarm inputs:	16ch: 16 x TTL, programmable as NC/NO 8ch: 8 x TTL, programmable as NC/NO
Alarm outputs:	1 x Relay with NO/NC contact; 24V DC/600mA
Activity detection:	16x12 grid, Sensitivity levels: 4
PTZ Control:	RS-232 interface
Remote Functions:	Live View, Search, Playback, Back-up, Configuration
Network Speed Control:	4 levels (100Kb ~ 2.5MB)/sec.
Network Protocol:	TCP/IP, DDNS and Web
Network Interface:	10/100-Base-TX, RJ-45


Camera: CVC6993R

Image Sensor:	High Resolution 1/4" Advanced Color Image Sensor
Video Format:	NTSC
Effective Pixels:	H: 656, V: 492
Resolution:	450 TV Line
Scan System:	2:1 Interlace
Sync System:	Internal
S/N Ratio:	More than 48dB
Iris:	AES
AES Shutter Speed:	1/60~1/50,000 Sec
Min Illumination:	0.6 Lux without IR LED, 0 Lux with IR LED
Video Output:	Composite 1.0Vpp @ 75 ohm
Lens/ Lens Mount:	5mm F 2.0/ Fixed
FOV (Diagonal):	50 degree
Termination:	BNC
IR LED/ Night Vision Range:	30 pieces / 850 nm / 50ft
Power Requirement:	12Vdc
Power Consumption:	220 mA or 3W max
Operating Temp Range:	-10° ~ 50° C
Environmental Rating:	IP 66

BACK PANEL:

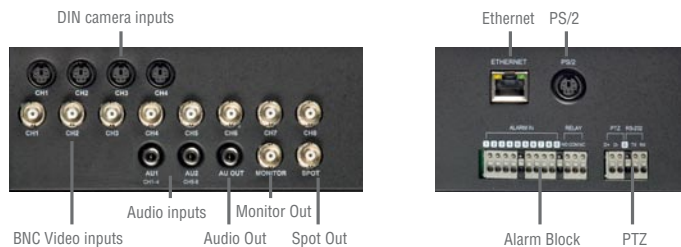

DIMENSIONS:

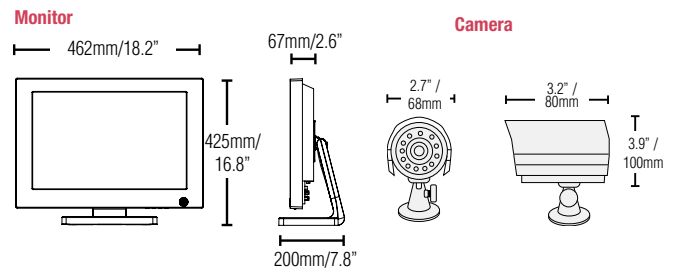

PRODUCT INFORMATION:

Model#:	L19WD804321 L19WD804321F - Universal Package
UPC:	L19WD804321 7-78597-19806-5 L19WD804321F 7-78597-19810-2
Weight:	18.4 kg / 40 lb
Package Dimensions:	604mm/23.8" x 584mm/23" x 334mm/13.2" (W x H x D)
Includes:	19" LCD DVR, 320GB HDD Pre-Installed, Remote Control, Power Supply, 4 Cameras & stands, 60 ft. camera extension cables (4), 10 ft. Ethernet cable, Software application CD, Mouse

Lorex Technology Inc.

300 Alden Road, Markham,
Ontario L3R 4C1
Canada.

3700 Koppers Street
Baltimore, Maryland 21227,
USA.

©2008 Lorex Technology Inc.
As our product is subject to continuous improvement,
Lorex Technology & subsidiaries reserve the right to modify
product design, specifications & prices without notice and
without incurring any obligation. E&OE

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>