

COLOR DIGITAL WIRELESS SURVEILLANCE SYSTEM WITH INDOOR/OUTDOOR NIGHT VISION CAMERA

Ultra Digital Wireless



Digital Pan/Tilt/Zoom Feature

FEATURES

- Easily Connects to Any TV/Monitor or DVR/DVD Recorder Wirelessly*
- 40ft (12m) Night Vision Range for No/Low Light Viewing***
- Enhanced Viewing Control with Digital Pan / Tilt / Zoom Feature
- Camera Can be Battery Operated for True Portable Wireless Operation
- System Expandable Up to 4 Switching Cameras
- Latest Ultra Digital Wireless Technology Provides Excellent Image Quality and Clarity
- Up to 450ft Wireless Transmission Range****
- Weather Resistant Metal Camera is Great for Indoor/Outdoor Surveillance
- Listen in with Exceptional Sound Clarity
- Safety Warning Feature Notifies You When out of Range
- Connect Multiple Receivers to a DVR/Surveillance System Wirelessly**

*Requires viewing/recording device with RCA Video or BNC Video input. Viewing/Recording device sold separately

**Additional receivers and/or cameras sold separately. See product manual for details


***Depending on scene reflection

****Maximum outdoor open transmission range. Actual range including indoor use dependent upon building materials and other obstructions in path of wireless signal

EXPANDIBLE UP TO FOUR CAMERAS



CONNECTS TO ANY TV/SURVEILLANCE SYSTEM

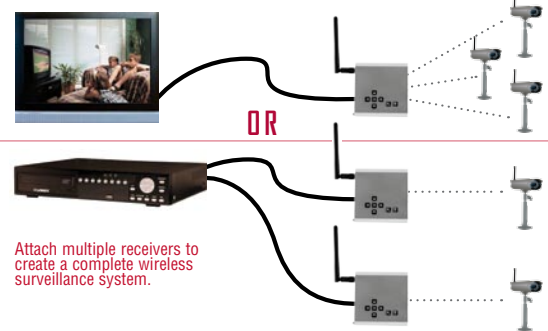

Attach multiple receivers to create a complete wireless surveillance system.



LW2101 Series

www.lorexcctv.com

COLOR DIGITAL WIRELESS SURVEILLANCE SYSTEM WITH INDOOR/OUTDOOR NIGHT VISION CAMERA

SPECIFICATIONS

General

Transmission Frequency:	ISM 2,400~2,485 MHz
Transmission Power:	13.5dBm
Unobstructed Effective Range:	450ft / 150m
Spread Spectrum:	FHSS
Modulation Mode:	GFSK / AFH
Operating Temperature:	14 ~ 104° Fahrenheit / - 10 ~ +40° Celsius
Operating Humidity:	<85%
Environmental Rating	IP44 Weather Resistant

Camera

Imaging Sensor Type:	CMOS
Picture Total Pixels:	640 x 480pxl (NTSC)
Minimum Illumination:	0Lux (IR on)
Night Video Distance:	40ft / 12m
View Angle:	50°
Image Resolution:	640 x 480 @ 8fps, 320 x 240 @ 20fps
Consumption Current (Max.):	450mA
Power Supply:	DC + 5V
Dimensions (W x D x H):	65x225x165*mm / 2.6x8.9x6.5" *
Weight:	540g / 1.2lbs

Receiver

LCD Screen Type:	N/A
Effective Pixels:	N/A
Receiving Sensitivity:	<.82dBm
Consumption Current (Max.):	250mA
Power Supply:	DC + 5V
Dimensions (W x D x H):	80x110x90**mm / 3.2x4.4x3.6" **
Weight:	140g / 0.3lbs

* With camera stand in wall mounting position and antenna pointing upwards

** With receiver antenna pointing upwards



PRODUCT INFORMATION

UPC:	LW2101 (NTSC version) - 7-78597-12101-8
	LW2101F (Universal Package) - 7-78597-12111-7
	LW2101P (PAL version) - 7-78597-12131-5
Package Weight:	1.2kg / 2.6lb
Package Dimensions:	298mm/11.75"(w) x 81mm/3.18"(d) x 235mm/9.25"(h)
Package Cube:	0.005cbm / 0.20cbf

CONTENTS

LW2101/ LW2101F/ LW2101P	1 x Slim Receiver 1 x Camera 1 x Camera Wall Mounting Bracket 2 x Power Adapters 1 x Battery Adapter Case 1 x RCA/BNC Adapter 1 x RCA Audio/Video Adapter Cable
---	---

ACCESSORIES

LW2101AC1	accessory camera
UPC:	7-78597-12121-6
Package Dimensions:	225mm/8.9"(w) x 80mm/3.15"(d) x 180mm/7.1"(h)
Package Weight:	0.9kg / 2lb



Lorex Technology Inc.

300 Alden Road, Markham,
Ontario L3R 4C1
Canada.

3700 Koppers Street
Baltimore, Maryland 21227,
USA.

©2008 Lorex Technology Inc.
As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE

5-12082008

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>