
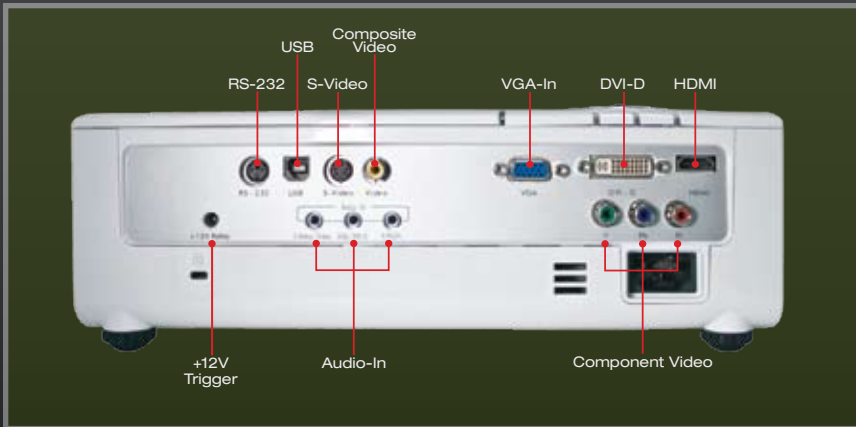


# Crossover Strength and Capacity

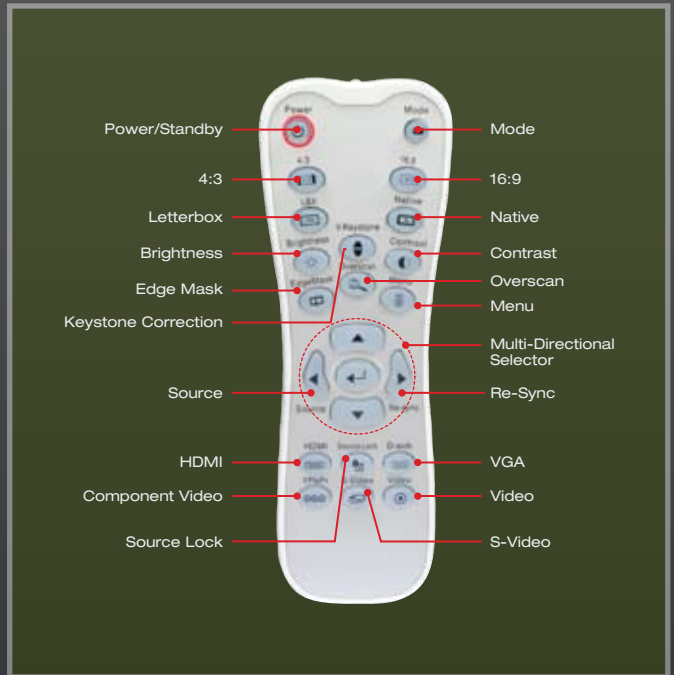

## Crossover Strength and Capacity

With amazing picture quality and a high brightness level of 2400 lumens, the Optoma HD71 expands the versatility of the home theater projector. The Optoma HD71 is the ideal crossover projector, perfect for both home and business use. Featuring a multitude of connectivity options and the latest in multi-color processing capabilities, the HD71 delivers rich and deep textures with ease in non-light controlled environments.

## HD71 FEATURES


- ❑ Ultra-bright home theater projector at 2400 lumens
- ❑ Native 720p (1280x720) resolution
- ❑ Multiple HD inputs, including: HDMI v1.3, DVI w/HDCP and component
- ❑ DLP® chipset and color processing technologies from Texas Instruments
- ❑ Weighs 6.3 pounds

# HD71 Home Theater

## Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	53.3	48.6
8	71.1	64.8
10	88.8	81.0
12	107.0	97.2
14	124.0	113.0
16	142.0	130.0
18	160.0	146.0

## Control Panel

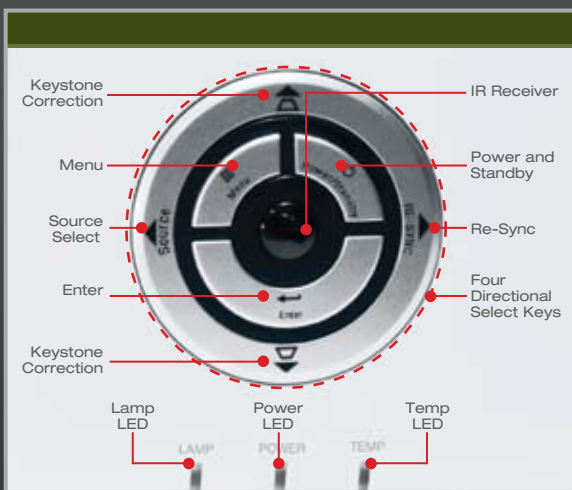

## Optional Accessories

Lamp:	BL-FP200E
Mount:	BM-1015N
Remote:	BR-3040B
DVI-D Male to HDMI Male Cable (2m):	BC-DDHMXX02
HDMI Cable (5m):	BC-HMHMXX05
DVI-D Male to HDMI Female Adapter:	BC-DIHMXY01
S-Video Cable (2m):	BC-SVSVXX02
Screen:	DS-9092PM

## Specifications

Display Technology:	Single 0.65" DarkChip2 DLP® Technology by Texas Instruments
Resolution:	Native 720p (1280 x 720)
Brightness (Typical):	2400 ANSI Lumens
Contrast Ratio:	4,000:1 in ImageAI Mode; 3000:1 (Full On/Full Off)
Lamp Life and Type:	2000/3000 Hours (STD/ECO)/300W
Throw Ratio:	1.55-1.7:1 (Distance/Width)
Image Size (Diagonal):	40" to 350" (1.0 to 8.9 m)
Projection Distance:	4.9' to 32.8' (1.5 to 10 m)
Noise Level (STD/ECO):	29dB/27dB (STD/ECO)
Remote Control:	Fully Featured Wireless IR Remote with Direct Source Selection
Computer Compatibility:	SXGA+, WXGA, XGA, SVGA, VGA, VESA, PC and Macintosh Compatible
Video Compatibility:	Full NTSC, PAL, SECAM, HDTV (576i/p, 720p, 1080i), SDTV (480i/p), 576i)
Aspect Ratio:	Native 16:9 with 4:3, LBX Support
Projection Lens:	F=2.46 ~2.58, f=21.79-23.99 mm; 1.1x Manual Zoom and Focus
User Controls:	Complete On Screen Menu Adjustments in 22 Languages
Keystone Correction:	Digital Horizontal and Vertical
Power Supply:	AC Input 100 - 240V, 50-60 Hz
Power Consumption:	270 Watts (Maximum), < 10 Watts 110V AC (Standby)
Weight:	6.3 lbs (2.9 kg)
Dimensions (W x H x D):	11.5" x 3.7" x 8.6" (295 x 96 x 222 mm)
Operating Temperature:	5 - 35°C, 80% Max Humidity
Displayable Colors:	16.7 Million
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	80%
Security:	One Kensington® Lock Port
I/O Connectors:	HDMI v1.3, Component Video, S-Video, VGA-In, Composite Video (RCA), DVI w/HDCP, RS-232, +12V Trigger Relay, Three Audio-In
Standard Accessories:	AC Power Cord, Component Cable, Remote Control, Batteries for Remote, Lens Cap, Quick Start Guide, Warranty Card, User's Manual and Extended Warranty Card
Optional Accessories:	Bering™ Ceiling Mount, Carrying Case, HDMI to HDMI Cable, DVI to DVI Cable, Gold Service Warranty and Panoview™ Series Screens
Warranty:	1 Year Limited Parts & Labor, 90 Days on Lamp
UPC:	796435 21 108 0

[www.OptomaUSA.com](http://www.OptomaUSA.com)



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>