


## In Your Corner for the Knock-Out Presentation

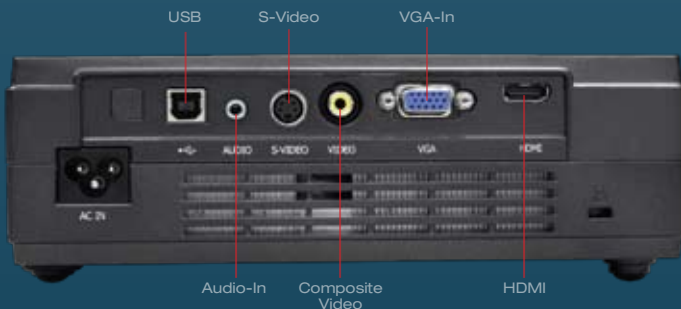

The TX7155 is an ultra-portable, powerful and all-around knock-out presentation tool. At only 3.2 pounds, the TX7155 features a brightness of 2500 lumens, native XGA resolution, HD compatibility and a variety of connections.

### TX7155 FEATURES


- ❑ Ultra-portable 3.2 pound DLP® projector
- ❑ Native XGA resolution and HD compatible
- ❑ 2500 lumens and 2500:1 contrast ratio
- ❑ Connections include: HDMI, VGA-In, S-Video, Composite, USB, Audio-In
- ❑ Ideal presentation remote with laser pointer and page advance features

# TX7155 | Multimedia Projector

## Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	50.0	40.9
8	66.7	54.5
10	83.3	68.2
12	100.0	81.8
14	116.7	95.5
16	133.3	109.1
18	150.0	122.7

## Control Panel

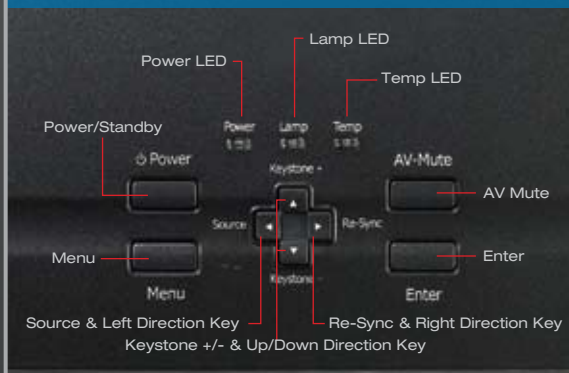

## Optional Accessories

Lamp:	BL-FS200C
Remote:	BR-5018L
Mount	BM-1020N
VGA Cable (1.8m):	BC-VGVGX02
HDMI Cable (7.5m):	BC-HMHMXX08
HDMI Cable (5m):	BC-HMHMXX05
Power Cord (1m):	BC-PUPNXY01
Power Cord (2m):	BC-PUPNXY02
S-Video Cable (2m):	BC-SVSVXX02
Composite Cable (1.8m):	BC-COCOX02
VGA to Component Cable (2m):	BC-VGCRXX02
Carrying Case:	BK-4021
84" 4:3 Manual Pull-Up Screen:	DP-MW3084A

## Specifications

Display Technology:	Single 0.55" DDR/DLP® Technology by Texas Instruments
Resolution:	Native XGA (1024 x 768)
Maximum Resolution:	UXGA (1600 x 1200)
Brightness (Typical):	2500 Lumens
Contrast Ratio:	2500:1 (Full On/Full Off)
Lamp Type:	200W SHP
Lamp Life (Bright/STD):	2000/3000 Hours
Throw Ratio:	1.8 to 2.2:1 (Distance/Width)
Image Size (Diagonal):	26.87" to 311.0" (.68 to 7.9 m)
Projection Distance:	3.9' to 39.4' (1.2 to 12.0 m)
Noise Level (Bright/STD):	36dB/33dB
Remote Control:	Fully Featured IR Remote with Laser Pointer and Mouse
Computer Compatibility:	VGA, SVGA, XGA, SXGA, SXGA+, UXGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	HDTV (1080i/p, 720p, 576i/p, 480i/p), NTSC, PAL, SECAM
Aspect Ratio:	4:3 Native, 16:9 & 5:4 Compatible
Projection Lens:	F=2.55-2.72, f=21.3-24.5 mm, 1.15x Manual Zoom & Focus
Offset:	128%
User Controls:	Complete on screen menu in 20 languages
Audio:	One Internal 1-Watt Speaker
Keystone Correction:	± 30° Vertical
Vertical Refresh Rate:	43 to 87 Hz
Horizontal Scan Rate:	15 to 91.4 KHz
Power Supply:	AC Input 100-240V, 50-60 Hz
Power Consumption:	250 Watts, <5 Watts Standby
Weight:	3.2 lbs (1.45 kg)
Dimensions (W x H x D):	8.66" x 2.79" x 7" (220 x 71 x 178 mm)
Operating Temperature:	5 to 40°C, 80% Max Humidity
Displayable Colors:	16.7 Million
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	One Kensington® Lock Port
I/O Connectors:	Digital Video - HDMI, VGA-In, Composite Video, S-Video, USB, Audio-In
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Composite Video Cable, Remote Control, Batteries for Remote, Lens Cap, Carrying Case, User's Manual, Quick Start Guide and Warranty Card
Optional Accessories:	VGA to Component Video Cable, HDMI Cable, HDMI to DVI Cable and Panoview™ Series Screens
Warranty:	Three Years Optoma Express Replacement Service, One Year on Lamp
UPC:	796435 11 108 3

[www.OptomaUSA.com](http://www.OptomaUSA.com)



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>