

Introduction

This booklet is a Quick Installation Guide through the basic steps needed to install the OmniView Universal PS/2 Adapter.



Package Contents

- OmniView Universal PS/2 Adapter
- Sun 13W3 Video Cable
- DIN8 Cable
- USB, VGA Cable Kit
- Quick Installation Guide


Product Benefits

- Converts Sun DIN8 and USB to PS2
- Converts Sun 13W3 video to HDDB15 SVGA
- Supports special Sun commands
- Does not require power
- Requires no software
- Emulates keyboard and mouse signals
- Supports Belkin ENTERPRISE Series KVM Switches
- Comes with the Belkin 2-Year Warranty

Technical Specifications

Part Number:	F1DE083
Keyboard & Mouse Input:	MiniDIN8, USB
Keyboard & Mouse Output:	PS/2
Video Input:	VGA, 13W3
Video Output:	VGA
Enclosure:	High-Impact Plastic
Width:	3 1/4"
Height:	1"
Depth:	3 1/2"
Weight:	3.5 oz.
Hardware Supported:	Sun & Mac®


Note: Specifications are subject to change without notice.

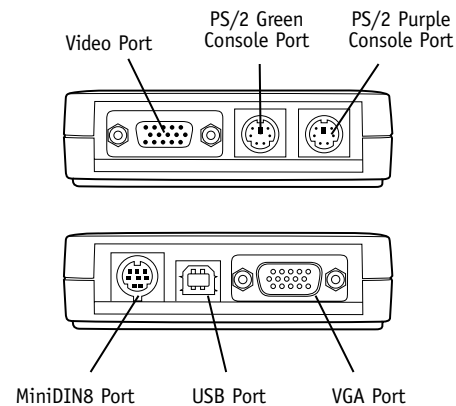

Installation: Step 1


Follow these steps if you are using a USB computer system

1. Shut down your computer. Take the included VGA cable and connect the male end of the cable to the VGA port on the back of the computer. Connect the female end of the VGA cable to the Adapter.
2. Take the included USB cable and connect it to the USB port on the back of the computer. Connect the other end of the USB cable to the Adapter.

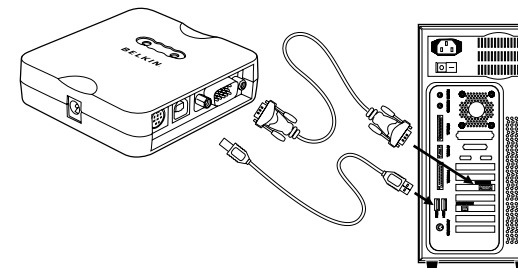

Follow these steps if you are using a Legacy Sun system


1. Shut down your computer. Take the included 13W3 cable and connect the end of the cable to the 13W3 port on the back of the computer. Connect the other end of the cable to the VGA port on the Adapter.
2. Take the included miniDIN8 cable and connect it to the designated port on the back of the computer. Connect the other end of the miniDIN8 cable to the Adapter.

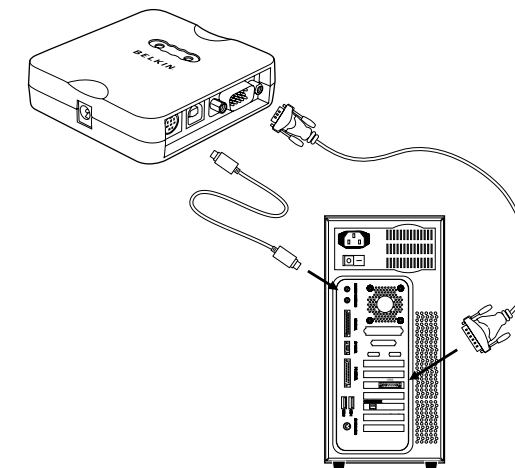

Installation: Step 2

Follow these steps to connect a console to the Adapter


1. Connect your PS/2-type keyboard and mouse to the appropriate PS/2 green and purple console ports on the Adapter.
2. Take the video cable that is attached to your VGA monitor and connect it to the blue console video port on the Adapter.
3. You may now power up your computer system.

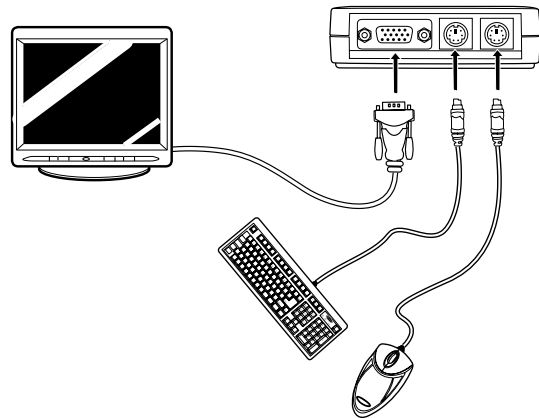

Installation: Step 3

Follow these steps to connect a KVM switch to the Adapter (optional)

1. Connect your PS/2 and VGA KVM cable kit to the appropriate console ports on the Adapter.
2. You may now power up your computer system.

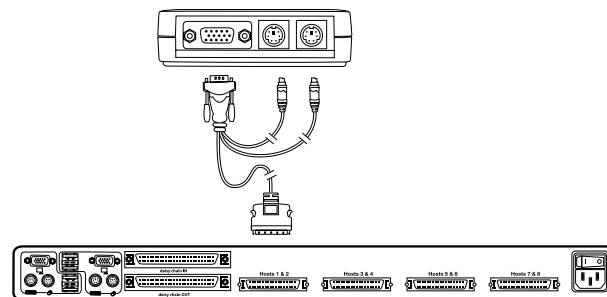

Belkin OmniView ENTERPRISE Quad-Bus Series 2x8 KVM Switch shown.



belkin.com

Belkin Corporation

501 West Walnut Street
Compton • CA • 90220 • USA
Tel: 310.898.1100
Fax: 310.898.1111

Belkin Ltd.

Express Business Park • Shipton Way
Rushden • NN10 6GL • United Kingdom
Tel: +44 (0) 1933 35 2000
Fax: +44 (0) 1933 31 2000

Belkin B.V.

Boeing Avenue 333
1119 PH Schiphol-Rijk • The Netherlands
Tel: +31 (0) 20 654 7300
Fax: +31 (0) 20 654 7349

Belkin Ltd.

7 Bowen Crescent • West Gosford
NSW 2250 • Australia
Tel: +61 (0) 2 4372 8600
Fax: +61 (0) 2 4372 8603

Belkin Tech Support

US: 310.898.1100 ext. 2263
800.223.5546 ext. 2263
Europe: 00 800 223 55 460
Australia: 1800 235 546

P74680

© 2004 Belkin Corporation. All rights reserved. All trade names are registered trademarks of respective manufacturers listed.



OmniView™

Universal PS/2 Adapter

Convert your Sun™ and USB platforms to PS/2 and VGA



Quick Installation Guide

F1DE083

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>