

C-CHARGER® AA SERIES™

AUTO EQUALIZE BATTERY CHARGERS

Electrically, the C-Charger is a paragon of efficiency and simplicity. It uses a ferroresonant transformer with integral self-regulation. It has been intelligently designed to be completely devoid of any complicated switching circuits that could possibly burn out. There are no tubes nor delicate electronics to fail or to cause radio frequency interference (RFI).

Voltage output to the batteries remains at a safe and constant DC level from full load to no load, even if AC power runs as high as 132 VAC or as low as 108 VAC. This automatic voltage regulation relieves strain on internal electrical components and lengthens the lifespan of the unit. All components are designed to operate safely and continuously in an ambient temperature as high as 122° F.

The Auto Equalizer Battery Charger is the first C-Charger to offer fully automatic equalizing. The advantages of automatic equalizing are clear:

no manual switching or settings, no waiting for power failure, no 9 to 24 hour overcharges, and no failure to return to float due to high load currents. The addition of an Auto Equalizer Charger expands the equalizing options of the C-Charger line, which also includes Float/Equalize Switch, 0-24 Hour Timer, and 0-24 Hour Automatic Equalizer Timer.

If battery voltage drops below a set value (i.e. 25.5 VDC), the charger switches to the equalize mode and the yellow equalize indicator illuminates. The charger remains in equalize mode until the battery voltage reaches another set value (i.e. 28 VDC). This ensures that the battery is completely recharged and not cycled. At this voltage the charger is switched to the float mode and the yellow equalize indicator turns off.



If battery voltage remains low, a red low voltage alarm indicator illuminates. If battery voltage remains high, a red high voltage alarm indicator illuminates. An optional summary alarm relay is available for remote locations. Adjustable low and high voltages permit users to tailor the charging system to specific batteries. Precise setting of these voltages is provided by fifteen turn potentiometers.

Features

- UL Listed
- Fully automatic equalizing
- Constant voltage output/continuous duty
- Equalize indicator and test button
- AC Power On indicator
- Low Voltage indicator
- High Voltage indicator
- DC ammeter and voltmeter
- AC circuit breaker
- Terminal board
- Vacuum impregnated, ferroresonant transformer for reliability
- Stainless steel for corrosion resistance
- Flush meters
- Isolated positive and negative: can be used as a negative voltage charger
- Two year limited warranty




**SOLID
POWER**

Specifications

| | |
|-----------------------|---|
| AC Input | 108-132 volts/60 Hz (220 volts/50 Hz optional) |
| Operating Temperature | 0° to 50° C (32° to 122° F) |
| Storage Temperature | -20° to 60° C (-4° to 140° F) |
| Cooling | Convection |
| DC Output | |
| - Float | 2.16 VPC for lead Acid, 1.45 VPC for nickel cadmium |
| - Equalize | 2.33 VPC for lead Acid, 1.55 VPC for nickel cadmium |
| Current Limit | Approximately 135% |
| Enclosure | 304 stainless steel hinged cover to facilitate installation |

| Model Number | D.C. Output | | Height Inches | Width Inches | Depth Inches | Approx. Weight |
|----------------|-------------|----------------|---------------|--------------|--------------|----------------|
| | Amps | System Voltage | | | | |
| 12 Volt | | | | | | |
| AA1206* | 6 | 12 | 11 | 9 | 8.5 | 12 |
| AA1210* | 10 | 12 | 11 | 9 | 8.5 | 14 |
| AA1220* | 20 | 12 | 11 | 9 | 8.5 | 22 |
| 24 Volt | | | | | | |
| AA2406* | 6 | 24 | 11 | 9 | 8.5 | 14 |
| AA2410* | 10 | 24 | 11 | 9 | 8.5 | 22 |
| AA2420* | 20 | 24 | 13 | 16.5 | 8.5 | 38 |
| 32 Volt | | | | | | |
| AA3206 | 6 | 32 | 11 | 9 | 8.5 | 22 |
| AA3210 | 10 | 32 | 11 | 9 | 8.5 | 26 |

*UL Listed

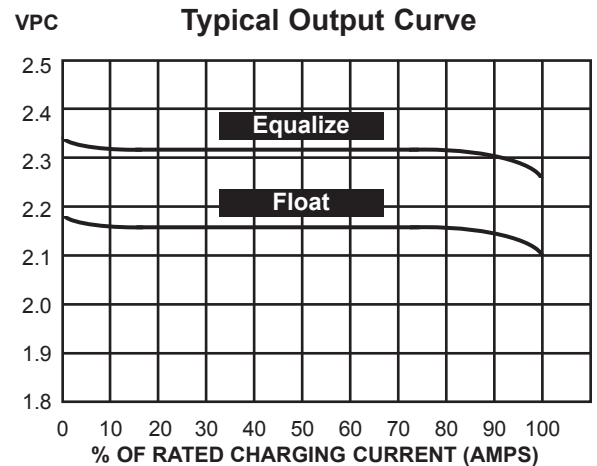

Optional Accessories

- Remote summary relay
- Low DC voltage alarm relay
- Combined Low/High voltage alarm relays
- Battery temperature compensation
- High DC voltage alarm relay
- AC power failure relay
- Current failure relay

Ordering Information

When ordering, please specify:

1. Model number
2. AC input: voltage & frequency
3. Battery type and number of cells
4. Ampere-hour capacity of battery
5. Recharge time desired
6. Description of load
7. Options

Contact your Charles sales representative for specific product information.



D-IND001-B01 Rev. 3



Charles Industries, Ltd.
Industrial Group
5600 Apollo Drive
Rolling Meadows, IL 60008 USA

Voice: (847) 806-6300
Fax: (847) 806-6352
E-mail: mktsterv@charlesindustries.com



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>