

**10/100/1000Mbps
Gigabit Ethernet Switch**

GSD-503/GSD-504

GSD-803/GSD-804

User's Manual

Trademarks

Copyright © PLANET Technology Corp. 2005.

Content subjects to revision without prior notice.

PLANET is a registered trademark of PLANET Technology Corp.

All other trademarks belong to their respective owners.

Disclaimer

PLANET Technology does not warrant that the hardware will work properly in all environments and applications, and makes no warranty and representation, either implied or expressed, with respect to the quality, performance, merchantability, or fitness for a particular purpose.

PLANET has made every effort to ensure that this User's Manual is accurate; PLANET disclaims liability for any inaccuracies or omissions that may have occurred.

Information in this User's Manual is subject to change without notice and does not represent a commitment on the part of PLANET. PLANET assumes no responsibility for any inaccuracies that may be contained in this User's Manual. PLANET makes no commitment to update or keep current the information in this User's Manual, and reserves the right to make improvements to this User's Manual and/or to the products described in this User's Manual, at any time without notice.

If you find information in this manual that is incorrect, misleading, or incomplete, we would appreciate your comments and suggestions.

FCC Warning

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the Instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at its own expense.

CE Mark Warning

This is a Class A product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

Revision

PLANET Gigabit Ethernet Switch User's Manual

FOR MODELS: GSD-503/GSD-504/GSD-803/GSD-804

Rev: 1.0(May.2005)

Part No.: 2010-A33110-000

1. INTRODUCTION

1.1 Package Contents

Check the contents of your package for following parts:

- Gigabit Ethernet Switch x1
- User's manual x1
- Power adapter x1

If any of these are missing or damaged, please contact your dealer immediately, if possible, retain the carton including the original packing material, and use them against to repack the product in case there is a need to return it to us for repair.

1.2 How to Use This Manual

This Gigabit Ethernet Switch User Manual is structured as follows:

Chapter 2 Installation

The chapter explains the feature, functionality and the physical installation of the Switch.

Chapter 3 Switch operation

The chapter explains the Gigabit Ethernet Switch transmit operation.

Chapter 4 Troubleshooting

The chapter explains the troubleshooting of the Gigabit Ethernet Switch.

Appendix A

This chapter contains cable information of the Gigabit Ethernet Switch.

1.3 Product Features

- Complies with IEEE802.3, 10Base-T, IEEE802.3u, 100Base-TX and IEEE802.3ab, 1000Base-T
- IEEE802.3x, full-duplex flow control compliant; back-pressure, half-duplex flow control
- 10/100/1000Mbps 5/8-port Gigabit Switch (RJ-45)
- 8K MAC address table auto-ageing, 112K(GSD-503/GSD-504) / 144K(GSD-803/GSD-804) bytes packet buffer
- 9.6K Jumbo packet size support
- Per port Auto-MDI, MDI-X detection
- Non-blocking, Store and Forward switching architecture
- Automatic source address learning and aging

1.4 Product Specifications

Model	GSD-503/GSD-504	GSD-803/GSD-804	
Hardware Specification			
Network Ports	5 10/100/1000Base-T RJ-45 MDI/MDI-X ports	8 10/100/1000Base-T RJ-45 MDI/MDI-X ports	
Dimensions (W x D x H)	155 x 86 x 26 mm (503)	155 x 86 x 26 mm (803)	
	170 x 87 x 32mm (504)	170 x 87 x 32 mm (804)	
Weight (KG)	0.42(503)	0.22(504)	0.43(803) 0.24(804)
Power Requirement	External Power adapter 12V 1A		
Switch Specification			
Switch Architecture	Store-and-forward		
Address Table	8K entries, auto learning/ageing		
Shared Data Buffer	112K bytes	144KB	
Flow Control	IEEE 802.3x full duplex operating and flow control		
Packet Control	Runt & CRC filtering, Broadcast storm control		
Switch Fabric	10Gbps	16Gbps	
Standard Conformance			
Network Standards	IEEE 802.3 (Ethernet), IEEE 802.3u (Fast Ethernet) IEEE 802.3ab (Gigabit Ethernet) and IEEE802.3x (flow control)		
Operation Temperature	0~50°C 10% to 90% (Non-condensing)		
Humidity	-40~70°C		
Regulation Compliance	FCC, CE		

2. INSTALLATION

This section describes the functionalities of the Gigabit Ethernet Switch's components and guides how to install it on the desktop. Basic knowledge of networking is assumed. Please read this chapter completely before continuing.

2.1 Product Description

The PLANET GSD-503/GSD-504 and GSD-803/GSD-804 are 5/8 ports 10/100/1000Mbps Ethernet switches in a compact housing for easily desktop placement.

The GSD-503/GSD-504 and GSD-803/GSD-804 provide 10/16Gbps non-blocking switch fabric, 8K MAC Address table, all support 802.3x full duplex flow control and also offers wire-speed packet transfer performance without risk of packet loss.

All five/eight RJ-45 copper interfaces support 10/100/1000Mbps auto-negotiation for optimal speed detection through RJ-45 Category 3, 4, 5 or above cables. MDI/MDI-X auto detection is provided for direct wire connection to any Ethernet device without requiring crossover cables.

2.1.1 Product Overview

PLANET GSD-503/GSD-504/GSD-803/GSD-804 are Gigabit Ethernet switches with 5/8 RJ-45 10/100/1000 Mbps ports for high-speed network connectivity. The switches can also automatically identify and determine the correct transmission speed and half/full duplex mode of the attached devices with its 5/8 ports. The Gigabit port with jumbo frame feature supported, can handle extremely large amounts of data transmission in a secure topology linking to a backbone or high-power servers.

This product also supports store-and-forward forwarding scheme to ensure low latency and high data integrity, eliminates unnecessary traffic and relieves congestion on critical network paths. With an intelligent address recognition algorithm, the switches could recognize up to 4K different MAC address and enables filtering and forwarding at full wire speed.

2.1.2 Switch Front Panel

Figure 2-1 & 2-2 show the front panel and rear panel of GSD-503




Figure 2-1 GSD-503 front panel

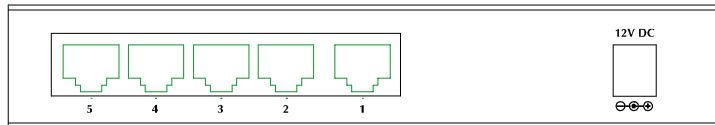


Figure 2-2 GSD-503 rear panel

Figure 2-3 & 2-4 show the front panel and rear panel of GSD-504




Figure 2-3 GSD-503 front panel

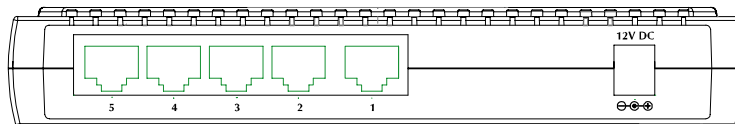


Figure 2-4 GSD-504 rear panel

Figure 2-5 & 2-6 show the front panel and rear panel of GSD-803




Figure 2-5 GSD-803 front panel

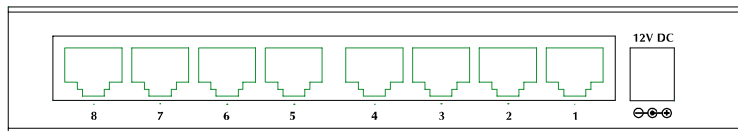


Figure 2-6 GSD-803 rear panel

Figure 2-7 & 2-8 show the front panel and rear panel of GSD-804




Figure 2-7 GSD-804 front panel

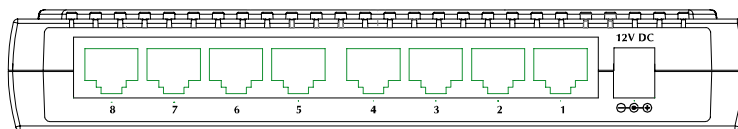


Figure 2-8 GSD-804 rear panel

2.1.3 LED Indicators

LED	Color	Function
PWR	Green	Lit: Power on
1000	Green	Lit: indicate that the port is operating at 1000Mbps. Blink: indicate that the switch is actively sending or receiving data over that port.
100	Green	Lit: indicate that the port is operating at 100Mbps. Blink: indicate that the switch is actively sending or

		receiving data over that port.
10	Green	Lit: indicate that the port is operating at 10Mbps. Blink: indicate that the switch is actively sending or receiving data over that port.

Power Notice:

1. The device is a power-required device, it means, it will not work till it is powered. If your networks should active all the time, please consider using UPS (Uninterrupted Power Supply) for your device. It will prevent you from network data loss or network downtime.

2. In some area, installing a surge suppression device may also help to protect your switch from being damaged by unregulated surge or current to the Switch or the power adapter.

2.2 Installing the Switch

This part describes how to install your Gigabit Ethernet Switch and make connections to it. Please read the following topics and perform the procedures in the order being presented.

Note: This switch does not need software configuration.

2.2.1 Desktop Installation

To install the switch on desktop, simply follow the next steps:

Step1: Attach the rubber feet to the recessed areas on the bottom of the switch.

Step2: Place the switch on desktop near a DC power source.

Step3: Keep enough ventilation space between the switch and the surrounding objects.

Note: When choosing a location, please keep in mind the environmental restrictions discussed in Chapter 1, Section 1.4 Product Specification.

Step4: Connect your switch to network devices.

- A. Connect one end of a standard network cable to the 10/100/1000 RJ-45 ports on the Back of the switch.
- B. Connect the other end of the cable to the network devices such as printer servers, workstations or routers...etc.

Note: Connection to the switch requires UTP Category 5 network cabling with RJ-45 tips. For more information, please see the Cabling Specification in Appendix A.

Step5: Supply power to the switch.

- A. Connect one end of the power cable to the switch.
- B. Connect the power plug of the power cable to a standard wall outlet.

When the switch receives power, the Power LED should remain solid Green.

3. SWITCH OPERATION

3.1 Address Table

The Switch is implemented with an address table. This address table composed of many entries. Each entry is used to store the address information of some node in network, including MAC address, port no, etc. This information comes from the learning process of Ethernet Switch.

3.2 Learning

When one packet comes in from any port, the Switch will record the source address, port no. And the other related information in address table. This information will be used to decide either forwarding or filtering for future packets.

3.3 Forwarding & Filtering

When one packet comes from some port of the Ethernet Switching, it will also check the destination address besides the source address learning. The Ethernet Switching will lookup the address-table for the destination address. If not found, this packet will be forwarded to all the other ports except the port, which this packet comes in. And these ports will transmit this packet to the network it connected. If found, and the destination address is located at different port from this packet comes in, the Ethernet Switching will forward this packet to the port where this destination address is located according to the information from address table. But, if the destination address is located at the same port with this packet comes in, then this packet will be filtered. Thereby increase the network throughput and availability.

3.4 Store-and-Forward

Store-and-Forward is one type of packet-forwarding techniques. A Store-and-Forward Ethernet Switching stores the incoming frame in an internal buffer, do the complete error checking before transmission. Therefore, no error packets occurrence, it is the best choice when a network needs efficiency and stability.

The Ethernet Switch scans the destination address from the packet-header, searches the routing table provided for the incoming port and forwards the packet, only if required. The fast forwarding makes the switch attractive for connecting servers directly to the network, thereby increasing throughput and availability. However, the switch is most commonly used to segment existing hubs, which nearly always improves overall performance. An Ethernet Switching can be easily configured in any Ethernet network environment to significantly boost bandwidth using conventional cabling and adapters.

Due to the learning function of the Ethernet switching, the source address and corresponding port number of each incoming and outgoing packet are stored in a routing table. This information is subsequently used to filter packets whose destination address is on the same segment as the source address. This confines the network traffic to its respective domain, reducing the overall load on the network.

The Switch performs "Store and forward" therefore, no error packets occur. More reliably, it reduces the re-transmission rate. No packet loss will occur.

3.5 Auto-Negotiation

The STP ports on the Switch have built-in "Auto-negotiation". This technology automatically sets the best possible bandwidth when a

connection is established with another network device (usually at Power On or Reset). This is done by detect the modes and speeds at the second of both device is connected and capable of, both 10Base-T and 100Base-TX devices can connect with the port in either Half- or Full-Duplex mode. 1000Base-T can be only connected in Full-duplex mode.

4. TROUBLESHOOTING

This chapter contains information to help you solve problems. If Giga Switch is not functioning properly, make sure the Ethernet Switch was set up according to instructions in this manual.

Some stations cannot talk to other stations located on the other port

Solution:

The address table may contain older information than of the address table of that node. Please power down to refresh the address information.

Performance is bad

Solution:

Check the full duplex status of the Ethernet Switch. If the Ethernet Switch is set to full duplex and the partner is set to half duplex, then the performance will be poor.

Why the Switch doesn't connect to the network

Solution:

- Check the LNK/ACT LED on the Switch
- Try another port on the Switch
- Make sure the cable is installed properly
- Make sure the cable is the right type
- Turn off the power. After a while, turn on power again

This page intentionally left blank!

Appendix A

A.1 Switch's RJ-45 Pin Assignments

1000Mbps, 1000Base T

Contact	MDI	MDI-X
1	BI_DA+	BI_DB+
2	BI_DA-	BI_DB-
3	BI_DB+	BI_DA+
4	BI_DC+	BI_DD+
5	BI_DC-	BI_DD-
6	BI_DB-	BI_DA-
7	BI_DD+	BI_DC+
8	BI_DD-	BI_DC-


Implicit implementation of the crossover function within a twisted-pair cable, or at a wiring panel, while not expressly forbidden, is beyond the scope of this standard.

A.2 10/100Mbps, 10/100Base-TX

When connecting your 10/100Mbps Ethernet Switch to another switch, a bridge or a hub, a straight or crossover cable is necessary. Each port of the Switch supports auto-MDI/MDI-X detection. That means you can directly connect the Switch to any Ethernet devices without making a crossover cable. The following table and diagram show the standard RJ-45 receptacle/ connector and their pin assignments::

RJ-45 Connector pin assignment		
Contact	MDI Media Dependant Interface	MDI-X Media Dependant Interface - Cross
1	Tx + (transmit)	RX + (receive)
2	Tx - (transmit)	RX - (receive)
3	Rx + (receive)	TX + (transmit)
4, 5	Not used	
6	RX - (receive)	TX - (transmit)
7, 8	Not used	

The standard cable, RJ-45 pin assignment

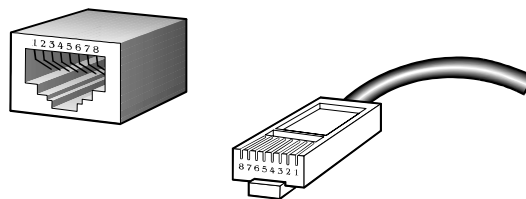

The standard RJ-45 receptacle/connector

There are 8 wires on a standard UTP/STP cable and each wire is color-coded. The following shows the pin allocation and color of straight cable and crossover cable connection:

2010-A33110-000



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>